




TopCore - TOPCORE-30A - Cargador Topcore 30a. 12v/24. Plomo-Acido Y Litio (Lifepo4)

Cargador de batería Topcore 30a. 12v/24. Plomo-Acido Y Litio (Lifepo4)

El cargador TOPCORE 30A es un cargador de batería inteligente con voltaje doble y corriente múltiple para uso profesional. Después de la conexión la carga se realiza automáticamente hasta su finalización, luego se inicia el modo de mantenimiento y mantiene la batería en un estado de carga completo hasta la desconexión, sin ningún desgaste. Para operar de manera segura, asegúrese de respetar todas las instrucciones de seguridad y precauciones personales descritas en el manual del producto.

Características técnicas: Entrada: 220-240V, 50-60Hz, 4,5A Salida: 12V (12,8V) y 24V (25,6V) 5/10/20/30A Tecnologías: Baterías de plomo-ácido: WET, MF, EFB, AGM y GEL Baterías de litio: LiFePO4 Aplicaciones: 5A para baterías entre 50A y 150A 10A para baterías entre 100A y 300A 20A para baterías entre 200A y 600A 30A para baterías entre 300A y 900A Funciones: Diagnóstico Recuperación de descarga profunda Modo de clima frío Carga de mantenimiento Fuente de alimentación 12-14,9V Conexión por pinzas



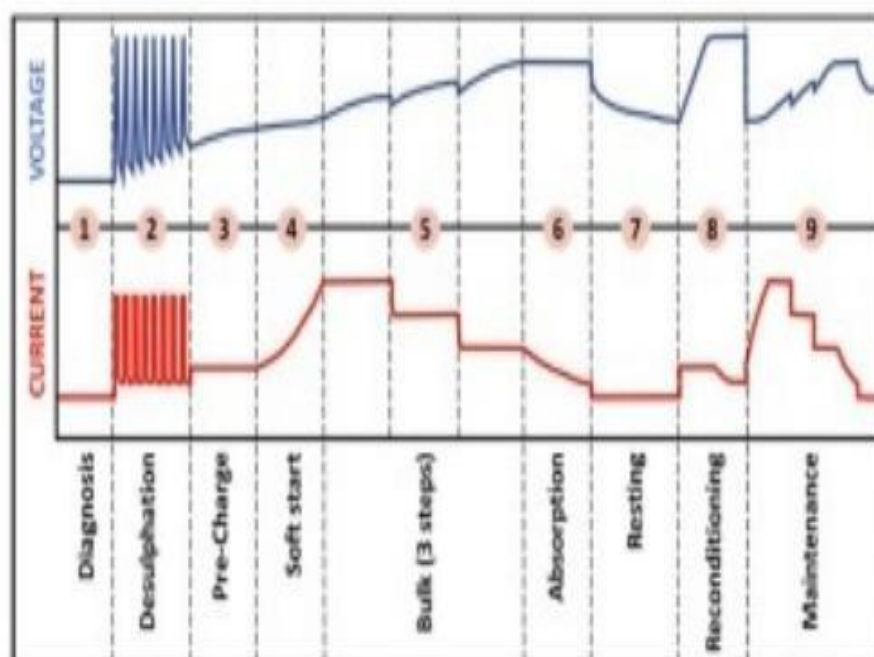

Technical Specifications

Input: 220-240V, 50-60Hz, 4,5A

Output: 12V(12,8V) or 24V(25,6V) -5/10/20/30A

Technologies: Lead-acid batteries: WET, MF, EFB, AGM & GEL
Lithium batteries: LFP (LiFePO₄)

Applications:
(indoor only) 5A mode: Batteries or series within 50-150Ah
10A mode: Batteries or series within 100-300Ah
20A mode: Batteries or series within 200-600Ah
30A mode: Batteries or series within 300-900Ah

Functions:

- Diagnosis
- Deep discharge recovery
- Cold weather mode
- Maintenance charge
- Power supply 12-14,9V

Safety protections:

- Reverse polarity/short circuit
- Overheating

Box content:

- Charger with cables (AC mains plug and rugged battery clamps)
- User manual

Other Topcore chargers:

- Topcore 1A-12V
- Topcore 4A-6/12V
- Topcore 8A-6/12V
- Topcore 15A-12/24V



9-STEP HIGH FREQUENCY BATTERY CHARGER 12/24V

WET MF EFB AGM GEL **Li-Ion**

Type: **Topcore 30A**

Barcode: 8436594880865

This is a **smart battery charger** with **dual voltage** and **multiple current** for professional use. After configuration and connection, charge is performed automatically until completion, then the **maintenance** mode initiates and keeps the battery in a full state of charge until disconnection, without any wearing. To operate safely, ensure you respect all safety instructions and personal precautions described in the product manual.

