

GM89L4K3_1 80 Ah

According to EN 50342



**AGM
Start Stop**

SEALED MAINTENANCE FREE



Electrical specification

Voltage:	12V
Capacity:	80 Ah
Cold cranking current:	840 A [EN]
Cold cranking current:	490 A [DIN]

Mechanical specification

Dimensional group:	L4
ETN reference:	580 901 084
DIN reference:	58001
Dimensions (LxWxH):	310x175x190
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	KAMINA
	Colour	Black

Vent caps	Material	Polypropylene
	Type	KAMINA
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level	Micro-cycle performance
W4	C2	V3	E3	M2


Weight

Battery weight:	17.00
Acid weight:	6.40
Total battery weight:	23.40

Layout

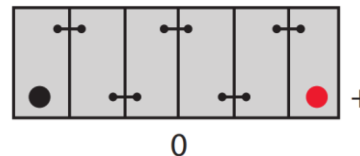

Hold-down



Separator

Type	AGM
-------------	------------