

ML45CK3_1 220 Ah

According to EN 50342



AGM series

HEAVY-DUTY VEHICLES



Electrical specification

Voltage:	12V
Capacity:	220 Ah
Cold cranking current:	1400 A [EN]
Cold cranking current:	840 A [DIN]

Mechanical specification

Dimensional group:	C
ETN reference:	720 901 140
DIN reference:	72001
Dimensions (LxWxH):	514x274x242
Cell Layout:	3
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	Kamina
	Colour	Black

Vent caps	Material	Polypropylene
	Type	Kamina
	Colour	Black

Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V3	E3


Weight

Battery weight:	48.00
Acid weight:	14.70
Total battery weight:	62.70

Layout

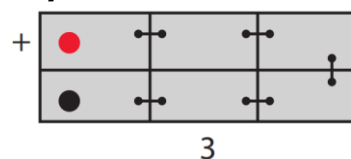

Hold-down



Separator

Type	AGM
-------------	------------